SECTION Nine (9) TOWNSHIP Ten (10)

Surveyed by P. T. Luther Surveyor of Bay County October 21. 22. 23 and 24th 1867, Lines perpetuated and corners established from one to eleven, after three weeks publication in the Bay County Weekly Aurora Borealis "Joseph Walker and W. Aubry chain carriers Sworn as the law provides Bearings taken at 4° Variation

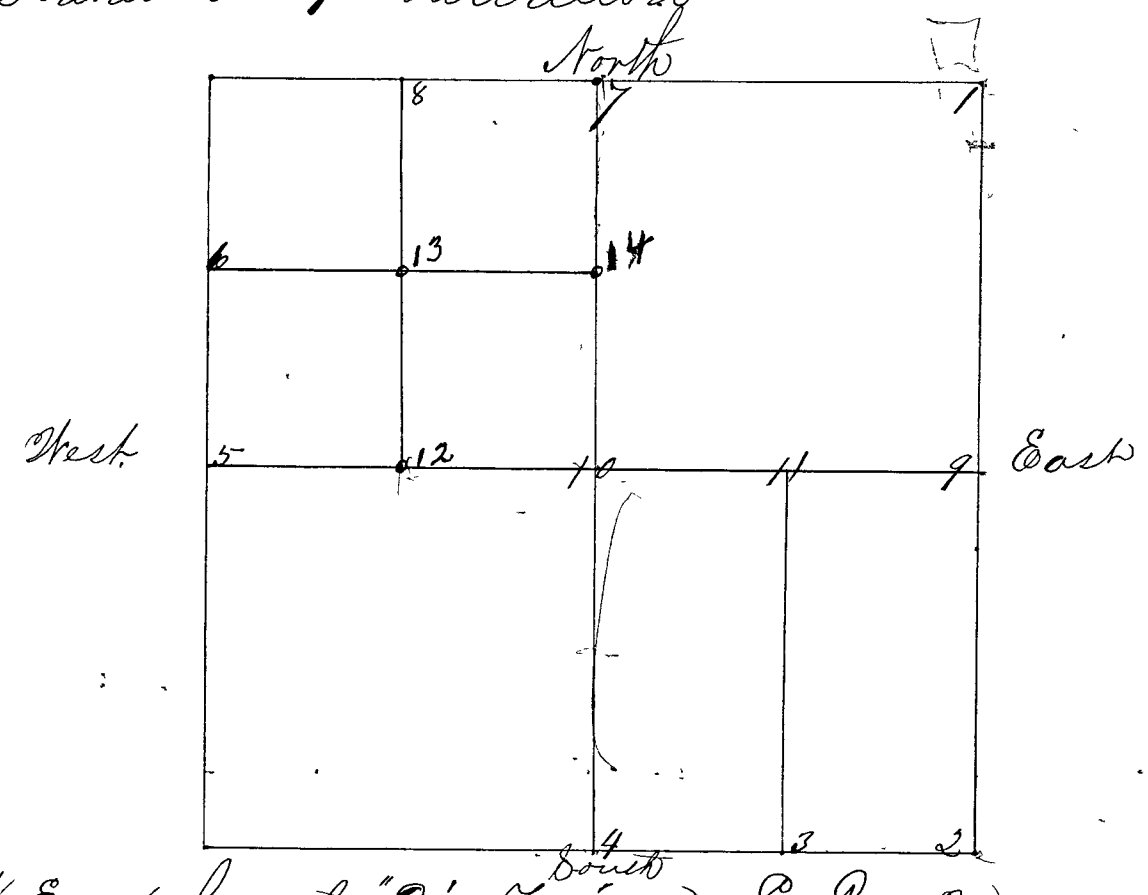

Cor 1 N E cor. found "Orig. Tree" a S. S. 15 in N 3, 4, 9, 10 T10 R7.
" " "Took new witness trees" a Hickory 12 N 15 E, 15 lks.
" " a Do. 12 S 81 E, 62½"
Cor 2 S. E. cor. "No trees to be found" Set by running North & South & East & West from known corners. a S. Stone 30 in N 3 9 10, 15, 16 T10 R7.
" " a Black Walnut 18 N 29 W. 214"
Cor 3 a Sand Stone 24 in N 1/8 No Green trees near.
Cor 4. S ¼ found, "O. B." Set a S. S. 18 in N 1/4 S. 9. & 16. Took one new witness
" " a Elm 14 N 78 W 18 "
Cor 5 W ¼ Mile corner Set by running one and one half miles. and
" " divide the distance (The line between 8 & 9 never was run by
" " the Government Survey, consequently there were never no
" " witness trees. Set a Sand Stone 17 in N 1/4 8 & 9.
" " a Sour Oak 24 N 38 E 68" "
" " a Ditto 18 S 54 E 73½"
Cor 6 a Sand Stone 15 in N 1/8.
" " a Black Oak 8 S 77½ E. 57½
" " a Jack Oak 6 N 67 E. 56"
Cor Resist. See Opposite Page 7 N ½ Set at equi dist. No bearings found; a S. S. 16 in N 1/4"
" " a Hickory 8 S 86½ E. 51"
Cor 8 a Sand Stone, 12 inches long marked 1/8
a Hickory 23 S 66½ W 105.