√354

SECTION Nine (9) , TOWNSHIP Eleven (11) ,

Surveyed by John H. Davis Surveyor of Clay County Indiana February 7th & 8th 1861 G. Hook & S. T. Cromwell chain carriers sworn as the law directs and corners set from No 1 to No 9.

South line Sec. 9 T11 R5 W

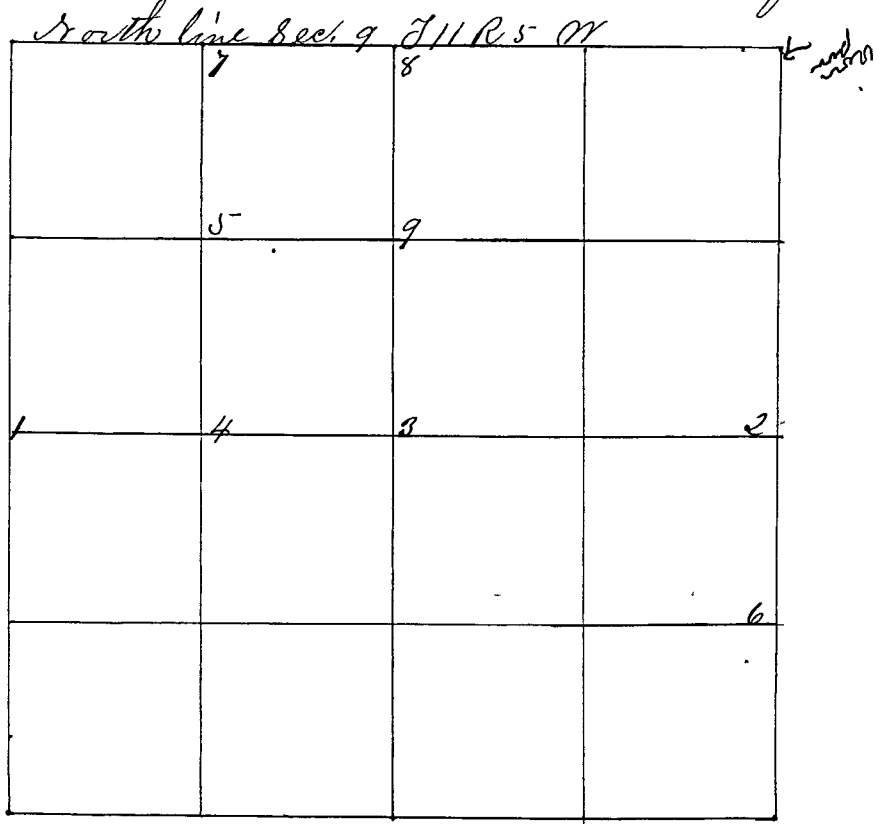

Cor. No. 1. Sand Stone 1/4 S. "Original trees found"

" " " Elm 16 in S 51 E 50½ Lks dist

" " " W. Oak 12 " S 24 E 146 "

" " 2 Sand Stone Mkd 1/4 S. Original bearing found

" " " S Stone Mkd + West + 7 "

" " " Beech 22 In N 23 W 6¼

" " 3 Sand Stone 1/4 S.

" " " S. Stone + S 42° 45 E 25½

" " " do, do, do, N 51 E 33 "

" " 4. S Stone Mkd 1/8 S.

" " " W. Oak 40 N 04 E 30¾ "

" " " S Stone + S 6 E 20 "

" " 5 Sand Stone 1/8 S

" " " S Stone Mkd + N 6 W 26½ "

" " " " " " + N 64 E 27 "

" " 6 Sand Stone 1/8 S

" " " Blk Walnut 10 N 79 E 163 "

" " " Beech 16 N 30 E 121 "

" " 7 Sand Stone 1/8 S.

" " " Beech 20 N 59° 30 E 41½ "

" " " Sugar 10 N 02 W 72 "

" " 8 Flint Stone Mkd 1/4 S

Orig. Sugar S 80 E. 14 Lks dist to

a Beech 12 N 78 W 16 " "