360

SECTION Sixteen (16) , TOWNSHIP Eleven. 11,

Surveyed by John Sharp. Surveyor, of Clay county. March 29th 1858 and corners set from No 166

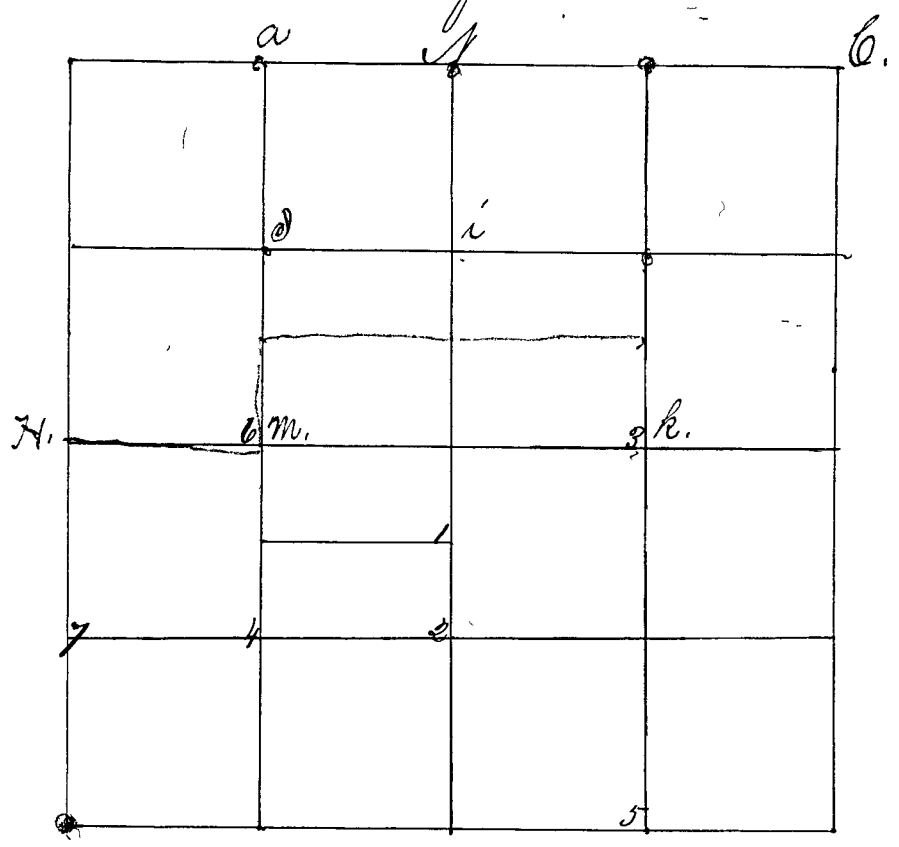

No 1. North East quarter of S W qr. on E side Sand Stone
" " Sugar 20 2. East 63 North 26 Links
No 2 Middle of the South West Quarter on E side
" " W. Oak 24 2. N 8 E 11 Links
No 3 Middle of East half of Section S Stone Marked 1/10
" " B Walnut 3 2n W 17 S 79 Links
No 4 Middle of S W Quarter Sand Stone
" " Beech 16 2n E 40 S 31 Links
No 5 Middle of S. E Quarter on S Side Sand Stone
" " Beech 20 2n. E 63 S 46 Links
No 6 Middle of W half of Section S. Stone
Poplar 12 2n W 61 S 17 links
No 6 Middle of West S W qr set by M. B. Crist at the request of C. M. Thompson & Thomas Cullin March the 2d 1872 Sand Stone M 16, 17

Further Surveyed by D. S. Maurer Deputy. S.C.C. Mar. 7th 10th 11th 1893. S. T. L. Miles and T. B. Nees Chain carriers, sworn

Cor. H.	Sand Stone	mr. 16X17.	20 in.		
" "	" "		21 "	N.	25 links
" "	" "		18 "	E.	25 "
" G.	" "	" S. 9,-10,-15,-16	30 "		
" "	Wild Cherry.			S 89 E.	ch 1.31 "
" "	Sand Stone	Mr + 1/8			
" "	" "		16	N.	50 "
" "	" "		19	W.	50 "