√366 SECTION Thirty two, 32, TOWNSHIP Eleven, 11,

Established by John H. Davis County Surveyor January 18th 19th 20th & 21st 1859. Corners set from No 1 to 26 Bearings taken with "Vernier plate" set at no variation Corners were perpetuated by the Parties having received ten days' written notice. Notice given by Charles Flevern

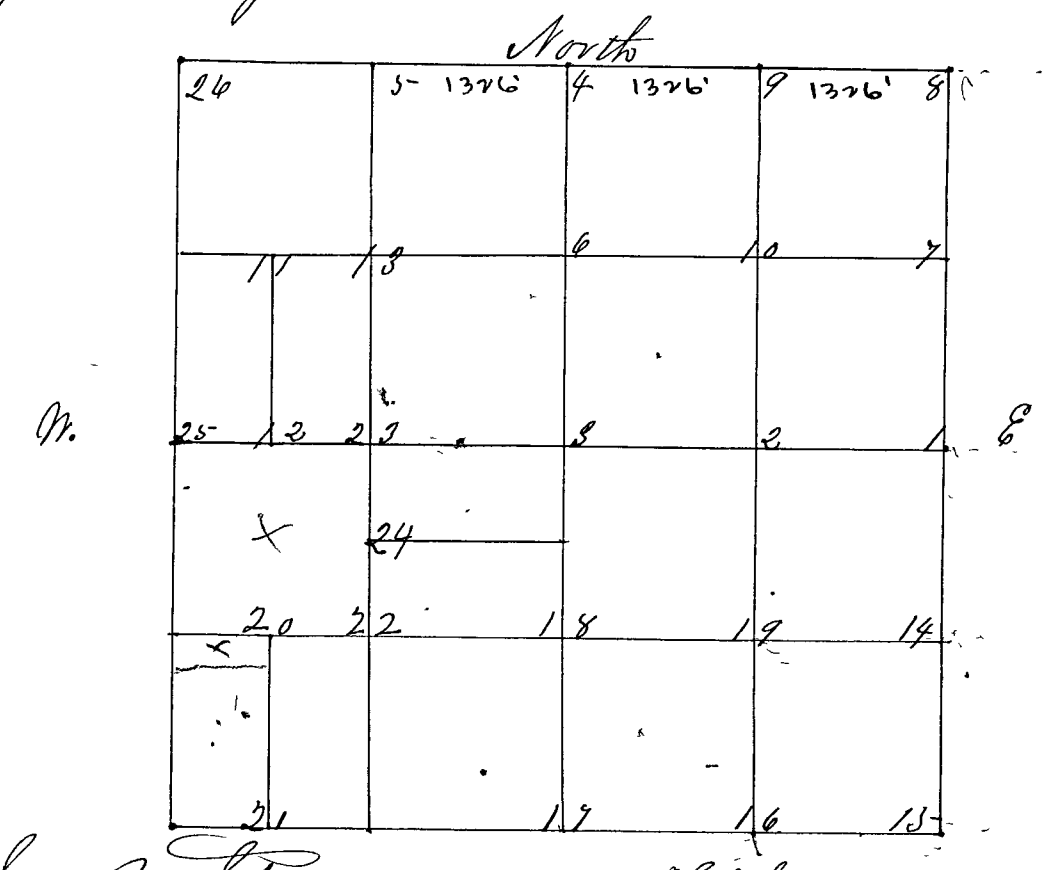



No	1	Sand Stone	Marked 1/4 S.		Hickory	18 in	S 20° W 22 Links
"	"	"	"	"	Water Beech	2 "	N 68 W 22 Links
"	2	"	"	1/8 S	S Gum	10 "	S 11 W 31 "
"	"				Water Beech	8 "	N 15 W 51 "
"	3	"	"	1/16 S	R. Oak	15 "	S 4 W 42 "
"	"				Beech	12 "	N 22 W 34½ "
"	4	"	"	1/4 S	Sugar	15 "	N 78 W 16 (Original
"	"				Beech	8 "	S 82 E 12 (Bearings)
"	5	"	"	1/8 S.	Cherry	14 "	N 37 W 1 Link
"	"				Hickory	5 "	N 50 E 25 Links.
"	6	"	"	1/8 S	Beech	16 "	N 61 E 24½ "
"	"				Do.	11 "	N 5° 30' W 17½ Lks.
"	7	"	"	1/8 S.	Ash	10 "	S 45° 30' E 72 Lks.
"	"				Water Beech	7 "	S 9 E 50 "
"	8	"	"	1/8 S 28 29 S 33	Original Bearings found and		
"	"				Corners established by them		
"	9	"	"	1/8 S	Beech	14 "	N 45° E 24 Lks.
"	"				Do.	12 "	N 7° W 45½ "
"	10	"	"	1/8 S.	Burr Oak	12 "	S 3 E 48 "
"	"				Do.	15	S 43° 30' W 65½ "
"	11	"	"	1/8 thus ⊥	No bearings taken		
"	12	"	"	1/8 " ⊥	No bearings taken		
"	13	"	"	1/8 S	Mulberry	8	N 45° 30' E 16½ "
"	"				Red Elm	6	S 7½ W 45½ "