SECTION Thirty (30) TOWNSHIP Twelve 12

Surveyed by John H Davis Surveyor of Bay Co March 6th 7th & 8th 1860 W. B. Cromwell & P. P. Thomas chain carriers sworn as the Law directs Corners set from No 1 to No 7 Bearings taken same as the lines

North Line Sec 30.

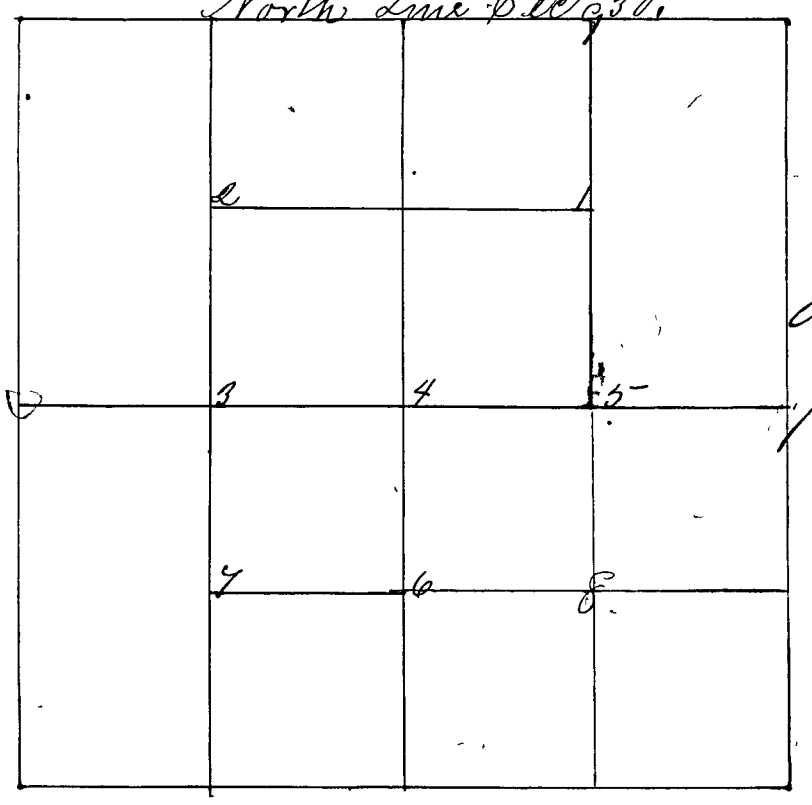

Morgan Rings
Sabing Stager
and Chas Murborges
present and consent
to Survey Apr 18/69
M. Dixer

Corner No 1 middle N.E 1/4 Sand Stone
" " " Witness S. Oak 8 N 61° E 22½ Lks.
" " " Sugar 18 N 42° 30' W 34½ Lks.
Corner No 2 middle of the N.W 1/4 Sand Stone.
" " " Witness, Beech 18 N 65° 30' E 2½ Lks.
" " " Ash 3 S 83 W 16 Lks.
Corner No, 3 Middle of the N 1/2 Sand Stone.
" " " Ash 4 Diameter N 77° E 8½ Lks.
" " " Ash 5 " S 1° E 33½ Lks.
Corner No 4 Center of the Section Sand Stone
" " " Cherry 8 S 22° 30' E 166 Lks.
" " " Red Oak 8 S 33° 45' E 181 Lks.
Corner No 5 Middle of the East half Sand Stone
" " " Red Oak 6 S 20° E 59 Lks. Horizontal
" " " Sugar 24 S 27 W 53 Lks.
Corner No 6 Middle of the S 1/2 Sand Stone
" " " Beech 15 N 32 E 20 Lks.
" " " Beech 18 N 77° W 29½ Lks.
Corner No 7 Middle of S.W 1/4 Sand Stone
Red Oak 4 N 8° E 16 Lks.
Poplar 5 S 45 E 4½ Lks
John H. Davis, S.C.C.

I do hereby certify the above and foregoing to be true and correct copies of the Records of Sections as are shown on old Book to this date. This August 4th 1868

P. T. Luther Surveyor G.C.