


Surveyed June 24 and July 1, 1873. by
Homer Hicks Surveyor Clay County.

Henry James and Saml. Steward Chammers
Henry Britshaw and Eyles Crabbe Flaymen {known}
Notice given to Residents by C. Banningard

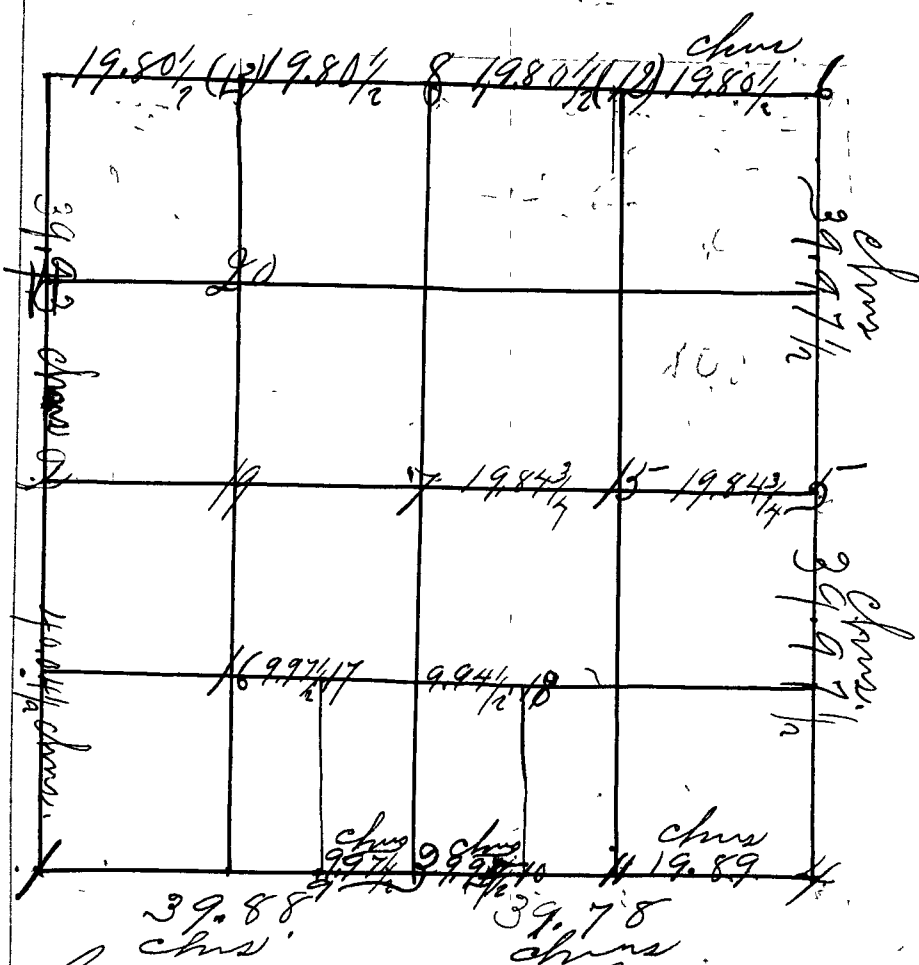

Corner No. 1 ^{chips} Sand Stone 20 in long Heron's
Corner lost This corner set by his witness.

New bearings taken at Beech L.O. N $11\frac{1}{2}$ E. 91 ft.
 a store south, 25 "

[illegible]

Set from Original Bearings.

Corner No. 9 set by Xerox Resat ~~to~~ Original. Bearings
same bearings taken for new corner.

Gunner No. 4 Niggerhead 16 mi long. Set by running north and south and East & West. "O. B." not found. 4 w.

: A Niggerhead No. w. 47 lbs &
a do do 41 "

Corner No. 5.

" No 3. Niggerhead 14 ins long fr. wh a sand stone & 10 lbs.

" " " Niggerhead N68 W. 22 LKS

" 6 " 16 in long set from "O. B." for wh

a Tigerhead \$49\frac{1}{2}\$ E. 60 lbs. 8

" 7 Sand Stone 18 in. thick 2 1/2

" 7 Sand Stone 18 ins long. ft. wh. Sand Stone No 40. 14 1/2 lbs
Do. S 14 E 18 "