


Surveyed Aug 9 1876 by Wesley Stark
 Dept Surveyors Survey made by request of
 David Evershart he being the only party
 interested

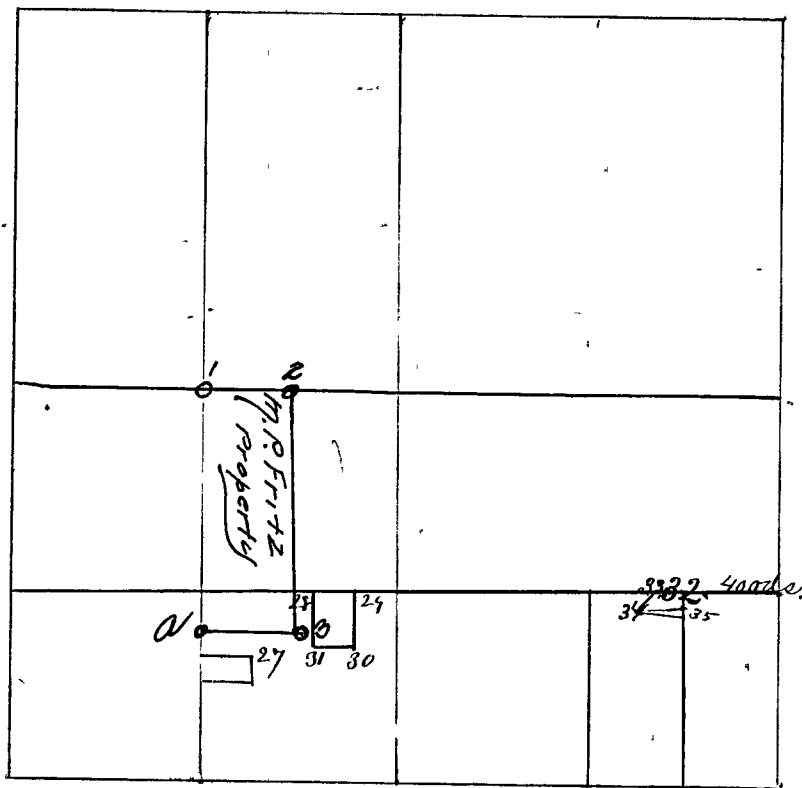

Corner 27 Sand Stone M x
 Sand Stone 5 diam North 50 ft
 Corner 28 Sand Stone M x
 Sand Stone 4 diam West 50 ft
 Corner 29 Sand Stone M x
 Sand Stone 8 " East 50 "
 Corner 30 Sand Stone M x
 Sand Stone 6 " " 50 "
 Corner 31 Sand Stone M x
 Sand Stone 4 " West 50 "
 Wesley Stark Dept.

Further Surveyed March 16th, 1882 by Homer Hicks Deputy Surveyor of
 Clay County Indiana. Survey made request of George W. Wagoner.

Corner No. 32 a sand stone 12 ins. long 40 rods W of the N.E. Corner of the S.E. 1/4 of S.E. 1/4
 of section and 15 ft. N. of a corner under the R.R.

Corner No. 33 a sand stone 16 ins long due W. of Corner 32, 266 ft. - 1/2 in. - an Elm 24 S 28 1/2 E. 122 ft. N.

Corner No. 34 a sand stone 7 x 14 ins. S 47 1/4 W of Corner 33. 232 ft.

Homer Hicks, Dept. S. C. C.

Corner No. 34 moved N. by order from the Circuit Court so as to be
 in line with corner No 33 and a corner at middle of the road S.W. where
 the two roads intersect