608

SECTION Eleven (11) TOWNSHIP Twelve (12)

Surveyed by Homer Hicks, Deputy County Surveyor, August the 26th & 27th, 1881.
Survey made by request of Thomas A. Wools, and consent of Elijah D. Wools, John N. Wools and William Wools.
Thomas A. Wools and Elias H. Wools, chainmen the first day. The second day John G. Hurt in place of Elias H. Wools. All sworn.

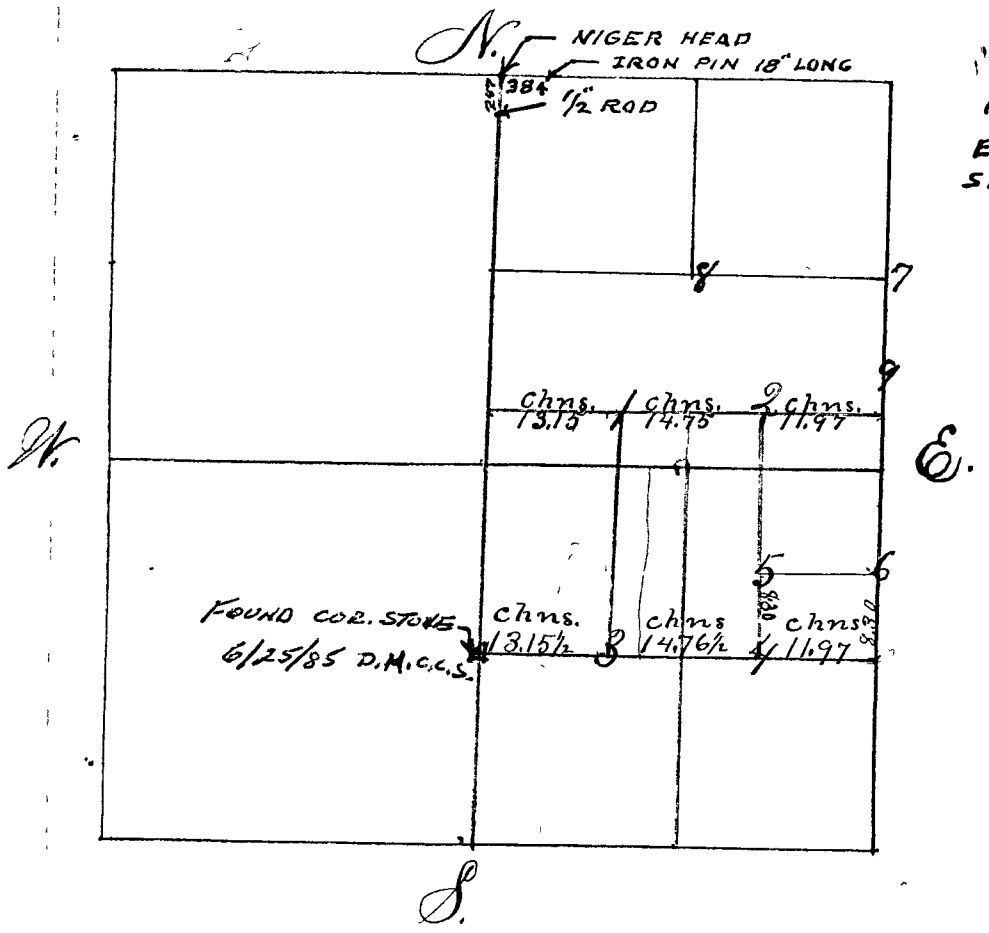

NOTE: BY ORDER OF COURT IRON PIN SET 12 FT. EAST OF NIGGERHEAD STONE, AND AT S.E. COR. SET 1" IRON PIN 4 FT. EAST OF ½" ROD.
APRIL 14, 1956 O.J. JENKINS S.C.C.

Corner No. 1. a Sand Stone 18 ins. long East of a corner said to have been set by William Hirom - 13.15 Chains - Wit. a Sand Stone 12 ins long S. 25 lks.
Corner No. 2. a Flint Sand Stone 16 ins. long - East of Corner No. 1, 14.75 chns.
" " " " Wit a Sand Stone 14 ins long S. 25 lks
" No. 3. a Sand Stone 16 ins long 13.15½ chns E. of W line of S.E. qr of Sec.
" " " " " Wit. a Lime Stone 10 ins long N. 20 lks.
" " 4 " " 14.76 Chains East of Cor. No. 3 fr. wh
" " " " " Sand Stone 15 ins. long East 25 lks.
" " 5 " " 16 ins. long 8.30 chns. N. of Corner No. 4.
" " " " " Wit. a Sand Stone 11 ins long S. 25 lks
" " 6 " " 15 ins long 8.30 chns. N. of S.E. cor. of N.E. qr. of S.E. qr.
" " " " " Wit. a Sand Stone 12 ins long west 30 lks.

Further surveyed by L. W. Wiem, Sept. 12-1901 at request of parties interested
Cor #7. B lime stone 6"X13" mr +
" 8. lime stone 10 X 17. Wit. SS 10X12 & 20 ft.
" 9. B limestone 10 X 14 mr. + S. of No. 7. 661 ft.
Further Surveyed June-6-1955 at request of Chena Slater. Parties interested duly notified
Found stone at ¼ Sec. line, set an ½" reinforcing bar 15" long 247 FT. South of Stone on line. Wit: nail in N.W side of 20" Sassafras Tree 1 Foot above ground S 6°-15' E. 23.8 FT.
Wit: nail in N.E. side of 24" Elm Tree 1 Foot above ground S 48°-00' W. 17.3 FT.
[illegible] entries. C.C.S.