


Surveyed by Thomas B. Robertson Surveyor of Clay County, Indiana July 12th 1883 after proper notice being given to parties interested - Chainmen and Flagman sworn as the law requires. Corners set from 1 & 2 - witnesses taken without any variation

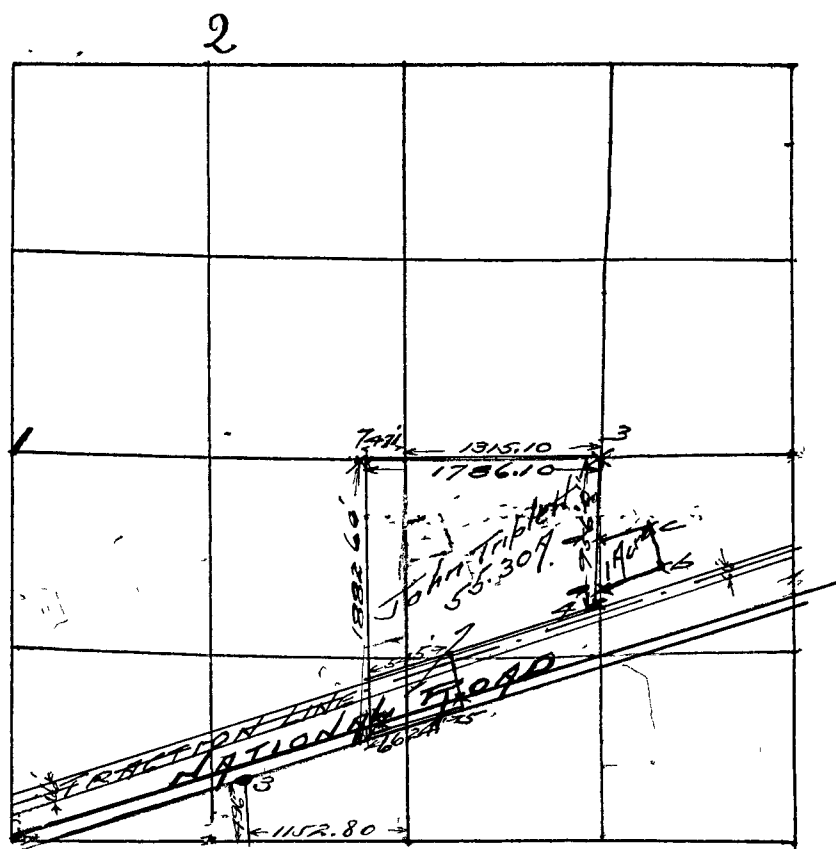

- Corner 1 A Stone 28 in. dia. $\frac{1}{4}$ from which a
 " White Oak Stump 48. N. 45° E. 136 Links and a
 Beech 26 in. N. 57½° E. 89 Links
 " 2 Stone (B.L.) dia. 8 from which
 a Beech 30 in. N. 22½° E. 25 Links

- Furthered Surveyed Oct. 1-1913, at the request of Mrs. Mollie Elliott and Fred Gorge, parties interested, no notice given. George A. Sheehan, S. C. C.
- Corner a An Iron Pin ½" x 15 - Set on ¼ Section Line
 " " 201.9' North of North-west Corner of Lot #18 Martin 1st Add.
 Corner b A Brick 4" x 7" x 12" - 239.50 N 70° E of corner a.
 Corner c A Brick 4" x 7" x 12" - 208.50 North westerly of corner b
 Corner d A Brick 4" x 7" x 12" - 167.50 S 70° W of corner c
 " " is 208.50' North of corner a on ¼ Section Line.
 Furthered surveyed July 1st 1913 - at request of Henry John's interested parties consenting. George A. Sheehan, S. C. C.
- Corner #3 a concrete hitch-block stake in top.
 " " a maple S 15° W 24' - 0".
 " " 1152.80' West and 436' - 0" North of the S.E. Cor. of S.W. ¼ - 28-13-6.